

VERSAVIDEO® 50" Ceiling Mounted Video Display

Non-MRI Compatible



Product Description

VERSAVIDEO® Video Displays bring the healing quality of nature or a favorite movie to patients with the tap of a finger. The Video Displays are engineered specifically for use in a healthcare facility and feature PDC's original Nature Videography, DVD integration or customer supplied content. Original 4K Nature Theme videography was developed to alleviate anxiety and improve patient satisfaction. Additional compatible music or patient audio system are also an option.

Features and Benefits

- VERSAVIDEO® Video Display, RF Shielded and 4K resolution
- Engineered specifically for healthcare environments
- Portrait, landscape and multiple-display configurations available
- Optional Touch Control System
- Optional Theme lighting and Theme audio integration
- Option for patient preview and Theme selection in a waiting area

Electrical

	Minimum	Typical	Maximum	Units
Input Voltage	-	42	-	VDC
Input Power	-	105	-	W
Input Current	-	2.6	-	ADC
Heat	-	358	-	BTU/h
Refresh Rate	-	60	-	Hz

Inputs

	Connection	Function
Power	42 VDC Wires	DC+
	42 VDC Wires	DC-
Fiber ST (2)	Fiber	Video


Compliance

	Minimum	Typical	Maximum	Units
Regulatory Safety	-	Listed	-	UL 62368-1 CSA C22.2 #62368-1 IEC 62368-1 IEC 60065 IEC 60950-1
CE	-	Pending	-	
RoHS	-	Pending	-	2011/65/EU

Environmental

	Minimum	Typical	Maximum	Units
Storage	-40	25	60	°C
Operating Temperature	0	25	40	°C
Humidity	20	-	80	%
Warranty	-	1	-	Years

1-03-000194

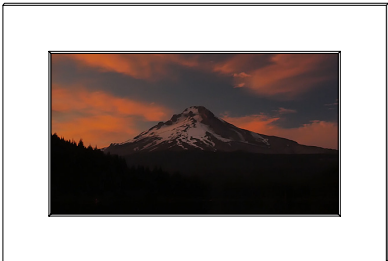

PDC Specification Submittal

Job Name:	
Job Number:	
Model Numbers:	Fixture Type:



Dimensions				
	Width	Height	Depth	Units
Monitor	48.0	30.4	3.0	inches
Monitor Resolution	3840	2160	-	pixels

Mechanical				
	Minimum	Typical	Maximum	Units
Enclosure	-	5052-H32 AL / Tempered Glass	-	-
Construction	-	Welded	-	-
Product Weight	-	-	200	lbs
Viewing Angle	-	176	-	-

Mechanical Diagram

