A21 LED Lamp 4000K





Product Description

The A21 LED Lamp delivers up to 1980 lumens of soft white light. These lamps feature a consistent and balanced omni-directional light source. A21 LED Lamps offer exceptionally cool operation for long LED lifetime and color stability. These lamps provide a consistent and balanced light source and were designed specifically for use in healthcare facilities.

Performance Summary	1
Initial Delivered Lumens: 1980 lm	
Input Power: 17 watts	
ССТ: 4000К	
Limited Warranty: 5 years	5.8
Lifetime: Designed to last 50,000 hours	
Dimming: Linear	





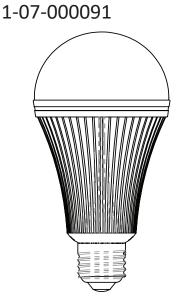

Mechanical				
	Minimum	Typical	Maximum	Units
Package	-	A21	-	-
Electrical Connection	-	E26	-	-
Fixture Weight	-	0.4	-	lbs
-				

Electrical				
	Minimum	Typical	Maximum	Units
Input Voltage	-	25	-	Vdc
Input Current	-	700	-	mA
Input Power	-	17	-	W
BTU	-	58	-	BTU/hr
Wiring	-	E26	-	

Compliance				
	Minimum	Typical	Maximum	Units
IP		20	-	Dry Location
Regulatory	-	Listed	-	UL 2108 CSA 22.2#250.2
RoHS	-	Certified	-	2011/65/EU 2015/863

Environmental

	Minimum	Typical	Maximum	Units
Storage Temperature	-40	25	85	С
Operating Temperature	-20	25	-	С
Humidity	5	-	95	%
Lifespan	50000	-	-	Hours
Warranty	-	5	-	Years

PDC Specification Submittal Job Name: Job Number: Model Numbers: Fixture Type:




© 2024 PDC Facilities, Inc. All rights reserved. For informational purposes only. Content is subject to change.

700 Walnut Ridge Dr. Hartland, WI 53029 • pdcbiz.com


Photometric Data and IES Distribution

Photometric				
	Minimum	Typical	Maximum	Units
Luminous Flux	-	1980	-	lm
CCT	-	4000	-	k
CRI	80	-	-	-
Chromaticity (u')	-	0.225	-	-
Chromaticity (v')	-	0.498	-	-
Efficacy	-	112.3	-	lm/W

Spectral Data Over Visible Wavelength

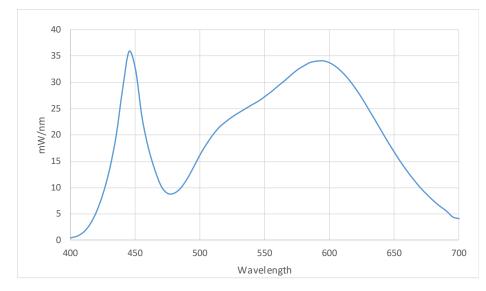



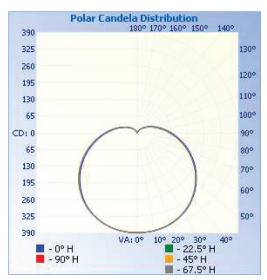

© 2024 PDC Facilities, Inc. All rights reserved. For informational purposes only. Content is subject to change.